


Schottky Diodes

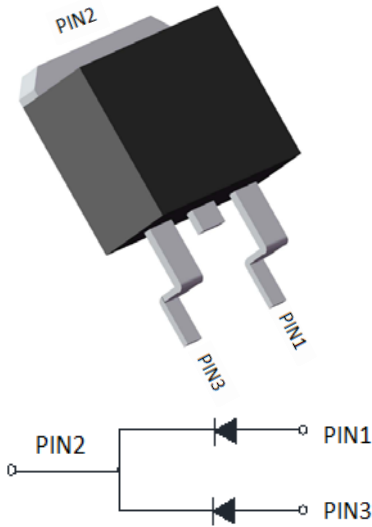

Features

- High frequency operation
- High purity, high temperature epoxy encapsulation for enhanced mechanical strength and moisture resistance
- Guard ring for enhanced ruggedness and long term reliability
- Part no. with suffix "Q" means AEC-Q101 qualified

Typical Applications

Typical applications are in switching power supplies, converters, automotive, freewheeling diodes, and reverse battery protection.

Mechanical Data

- **Package:** TO-263
Molding compound meets UL 94 V-0 flammability rating, RoHS-compliant
- **Terminals:** Tin plated leads, solderable per J-STD-002 and JESD22-B102
- **Polarity:** As marked

■Maximum Ratings (T_a=25°C Unless otherwise specified)

| PARAMETER | SYMBOL | UNIT | MBRB10200CTQ |
|---|------------------|------------------|--------------|
| Device marking code | | | MBRB10200CT |
| Repetitive peak reverse voltage | V _{RRM} | V | 200 |
| Average Rectified Output Current @60Hz -sine wave, T _c =150°C | I _O | A | 10 |
| Forward Surge Current (Non-repetitive) @60Hz Half-sine wave, 1 cycle, T _a =25°C | I _{FSM} | A | 150 |
| Current Squared Time @1ms≤t≤8.3ms T _J =25°C | I ² t | A ² s | 94 |
| Storage Temperature | T _{stg} | °C | -55 ~ +175 |
| Junction Temperature | T _J | °C | -55 ~ +175 |

■Electrical Characteristics (T_a=25°C Unless otherwise specified)

| PARAMETER | SYMBOL | UNIT | TEST CONDITIONS | Typ | Max |
|---|----------------|------|---|-----------------------|-----|
| Instantaneous forward voltage per diode | V _F | V | I _F =5A, T _J =25°C | 0.83 | 0.9 |
| | | | I _F =5A, T _J =125°C | 0.7 | 0.8 |
| Typical junction capacitance per diode | C _J | pF | V _R =4V, f=1 MHz | 105 | - |
| Instantaneous reverse current per diode | I _R | mA | V _R =200V | T _J =25°C | - |
| | | | | T _J =125°C | - |

■Thermal Characteristics (T_a=25°C Unless otherwise specified)

| PARAMETER | SYMBOL | UNIT | MBRB10200CTQ |
|--------------------------------------|-------------------|------|--------------|
| Typical thermal resistance per diode | R _{θJ-A} | °C/W | 50 |
| | R _{θJ-C} | °C/W | 2 |



■ Characteristics (Typical)

Fig.1: Forward Current Derating Curve

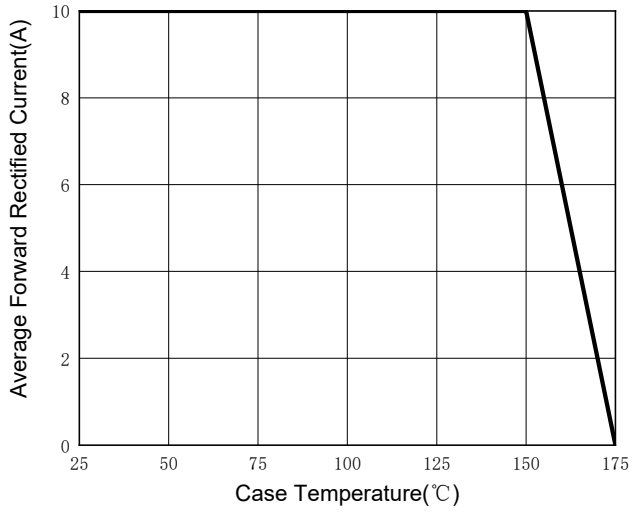


Fig.2: Forward Surge Current Capability(Per Diode)

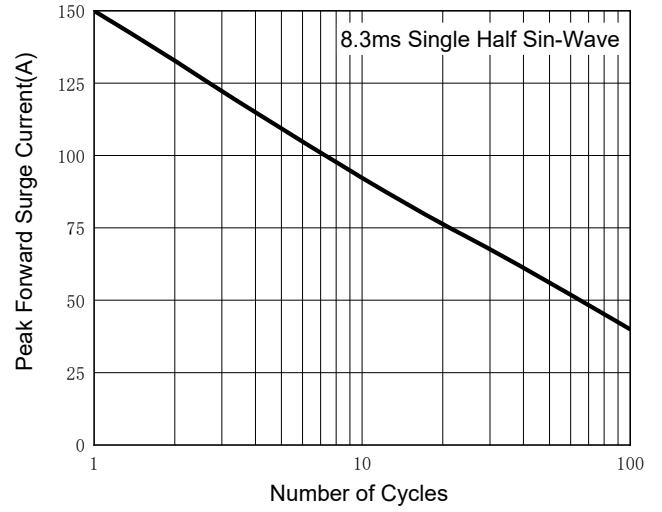


Fig.3: Typical Instantaneous Forward Characteristics(Per Diode)

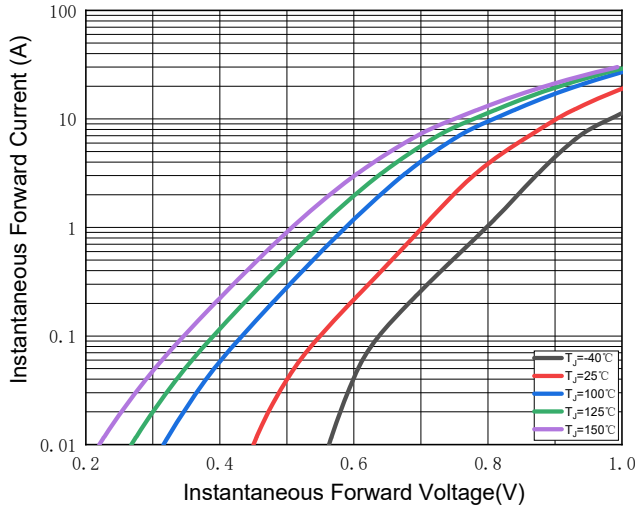


Fig.4: Typical Reverse Leakage Characteristics(Per Diode)


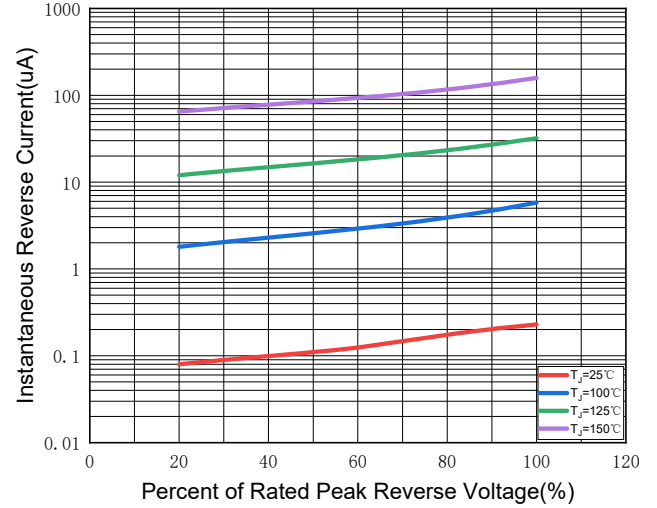


Fig.5: Typical Junction Capacitance(Per Diode)



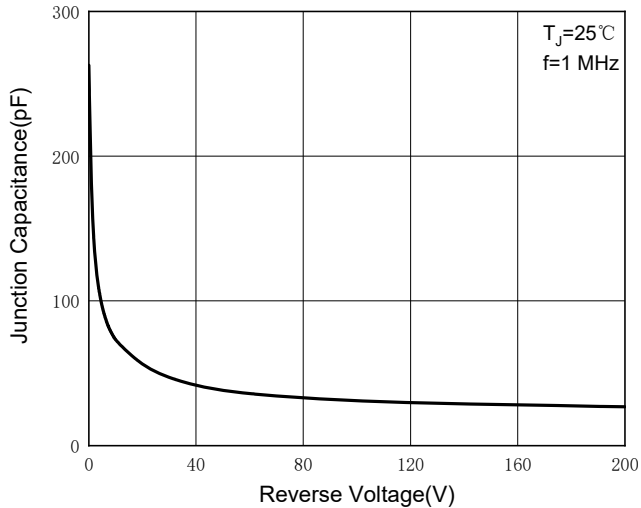


MBRB10200CTQ

Ordering Information (Example)


| PREFERED P/N | UNIT WEIGHT(g) | MINIIMUM PACKAGE(pcs) | INNER BOX QUANTITY(pcs) | OUTER CARTON QUANTITY(pcs) | DELIVERY MODE |
|--------------|------------------|-----------------------|-------------------------|----------------------------|---------------|
| MBRB10200CTQ | Approximate 1.43 | 1000 | 2000 | 10000 | Reel |

Outline Dimensions

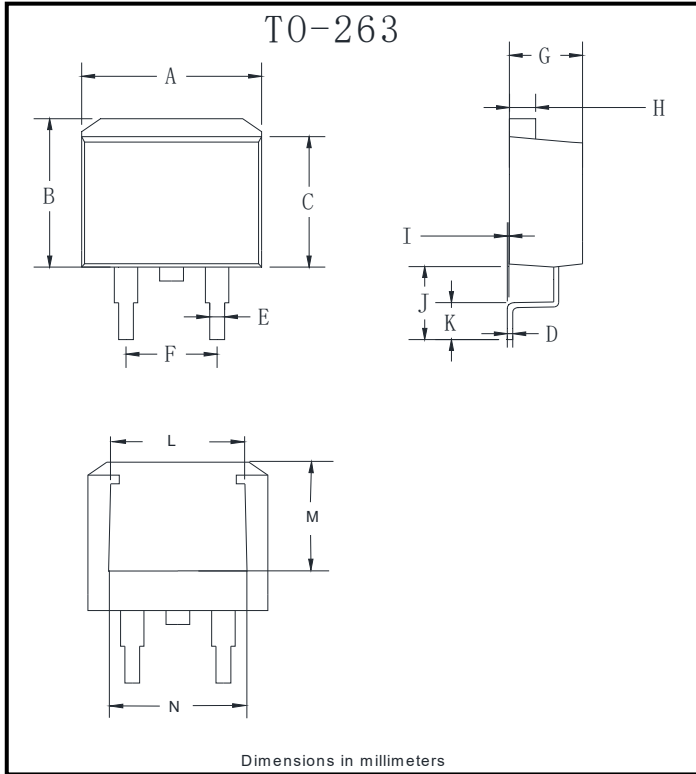

| TO-263 | | |
|--------|------|------|
| Dim | Min | Max |
| A | 9.5 | 10.5 |
| B | 9.7 | 10.5 |
| C | 8.4 | 9.0 |
| D | 0.28 | 0.64 |
| E | 0.68 | 0.94 |
| F | 4.55 | 5.6 |
| G | 4.04 | 5.10 |
| H | 1.14 | 1.4 |
| I | 0 | 0.2 |
| J | 4.9 | 6.05 |
| K | 1.79 | 2.79 |
| L | 7.3 | 7.9 |
| M | 6.2 | 6.8 |
| N | 7.6 | 8.2 |

Suggested Pad Layout

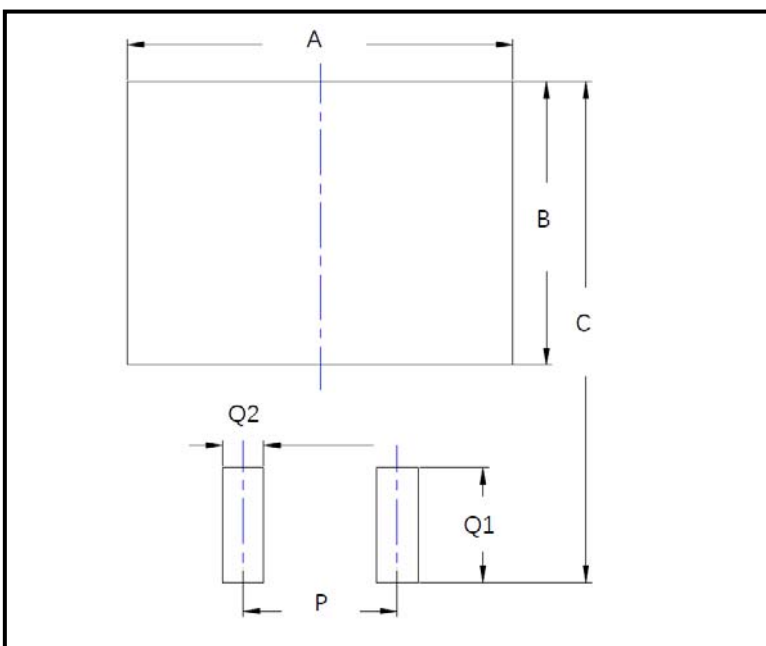

| Dim | Millimeters |
|-----|-------------|
| A | 12.7 |
| B | 9.4 |
| C | 16.6 |
| P | 5.08 |
| Q1 | 3.8 |
| Q2 | 1.35 |



MBRB10200CTQ

Disclaimer

The information presented in this document is for reference only. Yangzhou Yangjie Electronic Technology Co., Ltd. reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function or design or otherwise.

The product listed herein is designed to be used with automotive electronics, are not designed for use in medical, lifesaving, lifesustaining, or military, Yangjie or anyone on its behalf, assumes no responsibility or liability for any damages resulting from such improper use of sale.

This publication supersedes & replaces all information previously supplied. For additional information, please visit our website [http:// www.21yangjie.com](http://www.21yangjie.com) , or consult your nearest Yangjie's sales office for further assistance.